




Phonak Brio 4 B-312


SlimTube HE 2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

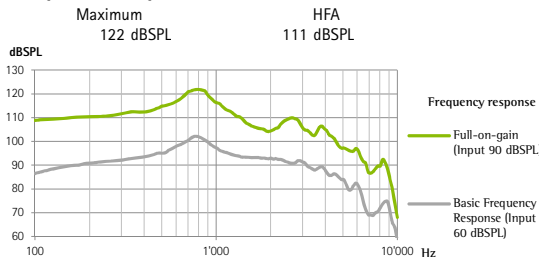


Acoustic gain

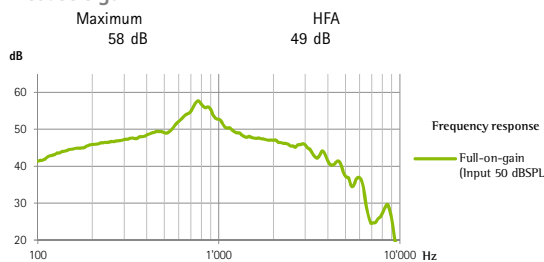

Frequency range	<100 Hz - >6500 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.5%	1.5%	2.0%	1.0%
Battery current	1.5 mA			
Equivalent input noise level	19 dB SPL			


Induction coil sensitivity

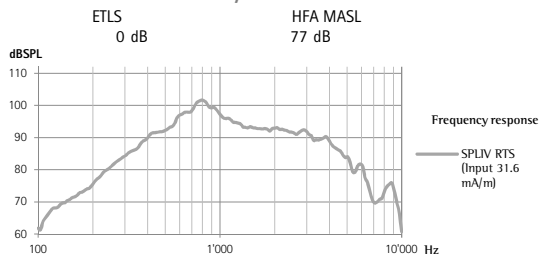


HE11 680 2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

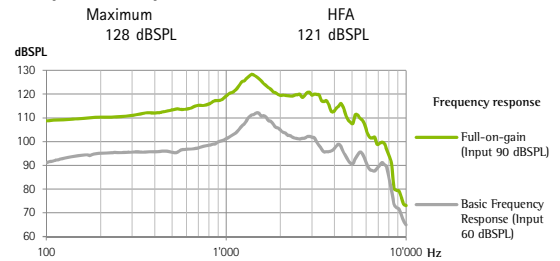


Acoustic gain

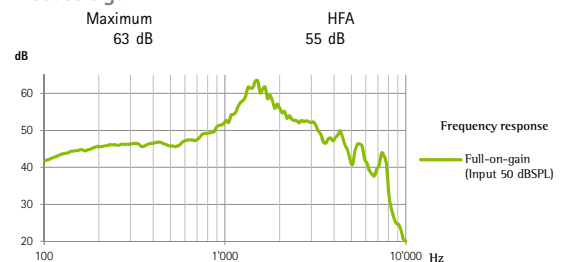

Frequency range	<100 Hz - >8000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	5.0%	3.0%	2.0%	1.0%
Battery current	1.6 mA			
Equivalent input noise level	19 dB SPL			

Induction coil sensitivity

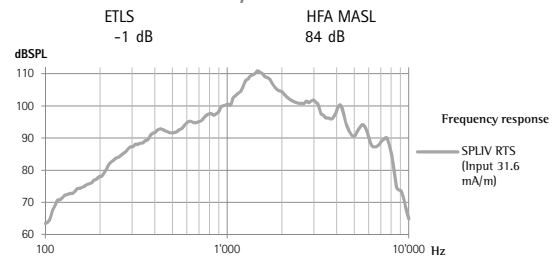

General test information

- Supply voltage 1.3 V / impedance 6.2 Ω.
- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- All data obtained are measured with Phonak Target measurement settings

Warning: Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.



Sonova AG · Laubisrütistrasse 28
CH-8712 Stäfa · Switzerland

PHONAK
life is on